

Fig. 1

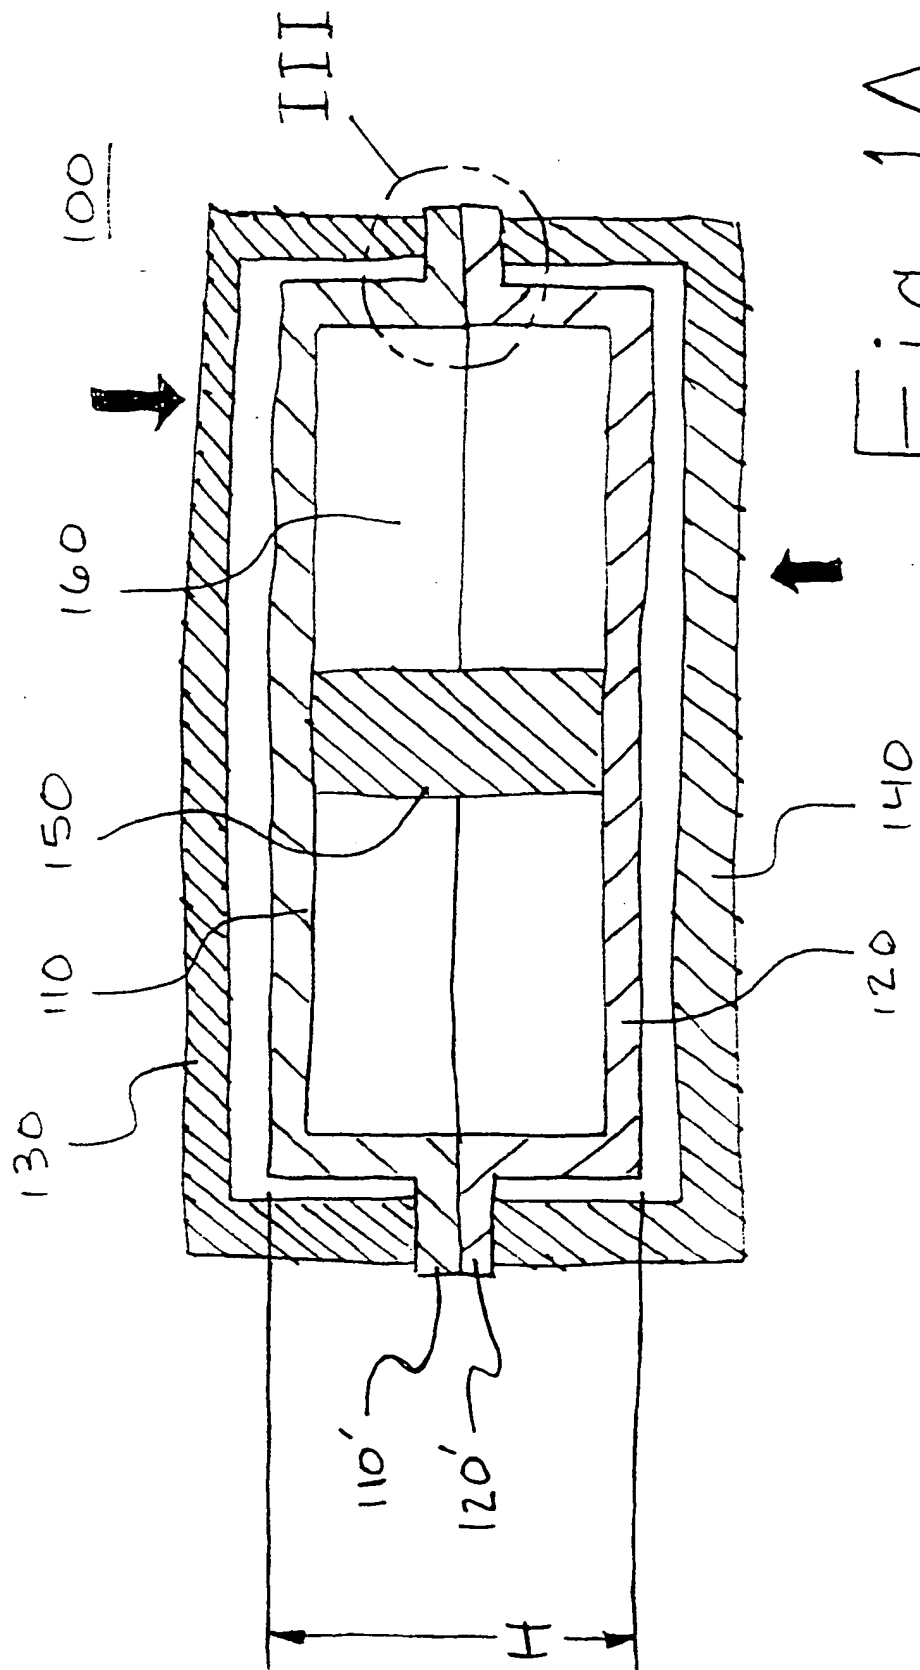


Fig. 1A

FIG. 1 is a perspective view of a device 100 in a first state, and FIG. 2 is a perspective view of the device 100 in a second state.

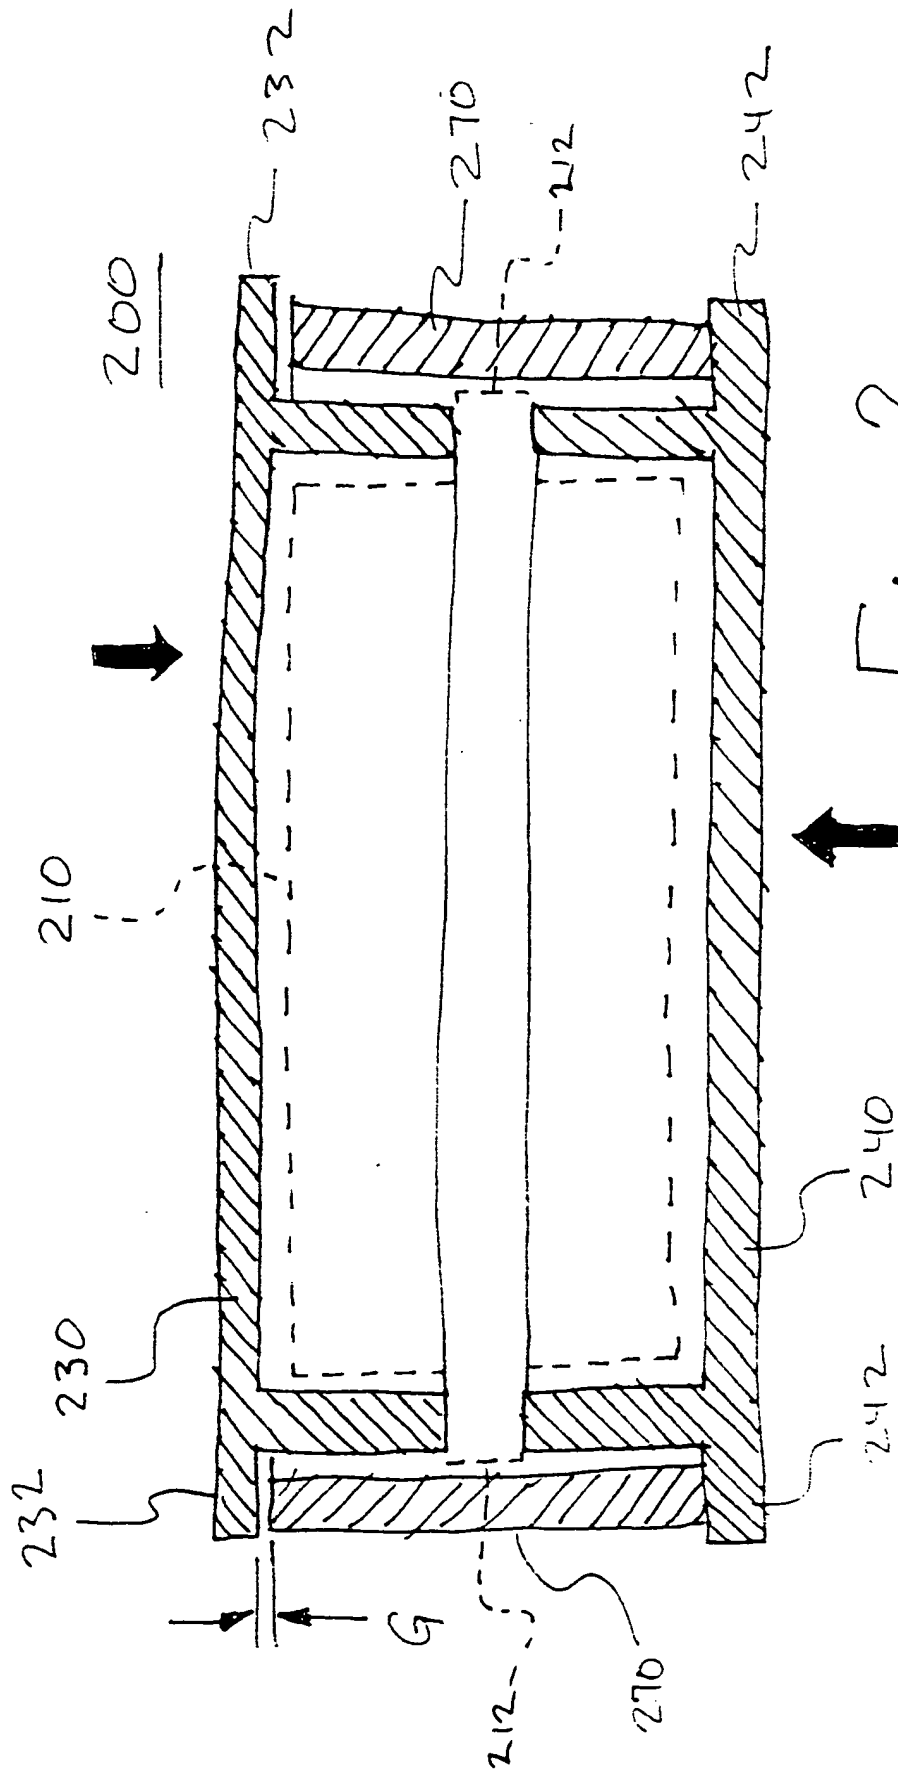


Fig. 2

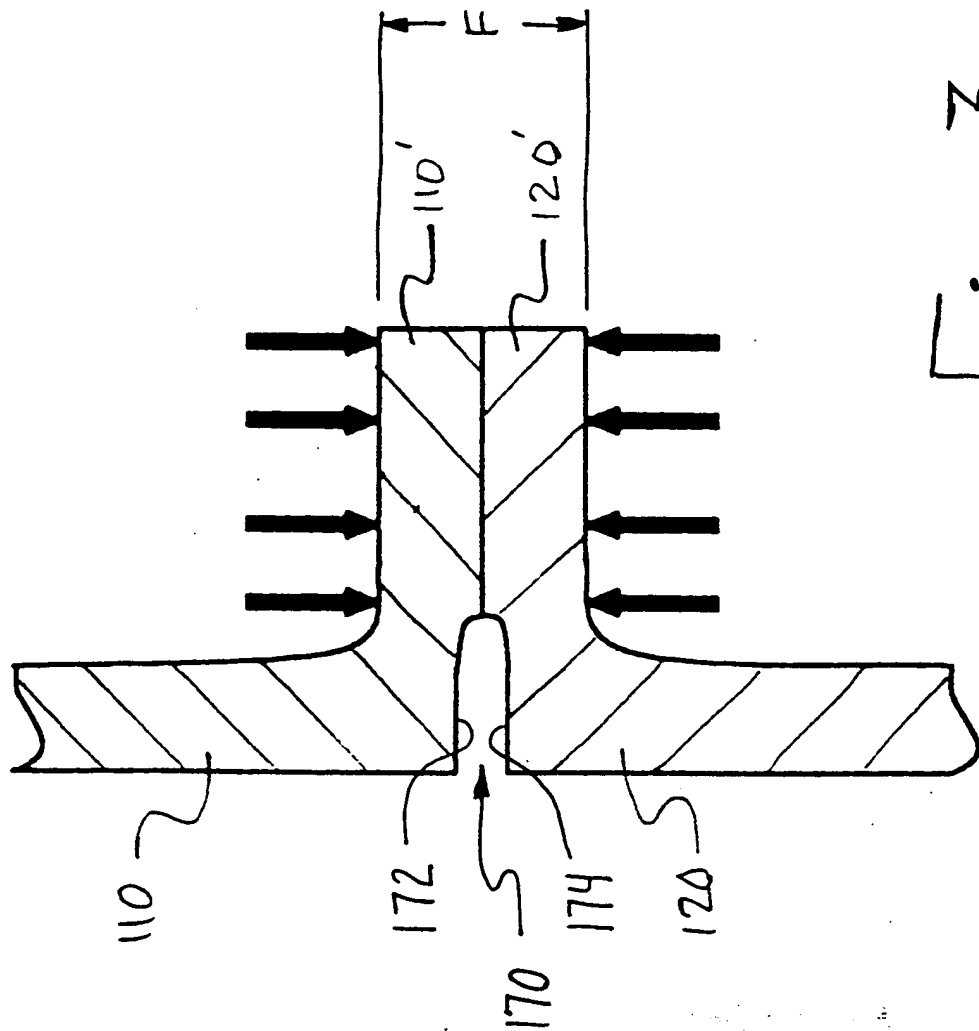


Fig. 3

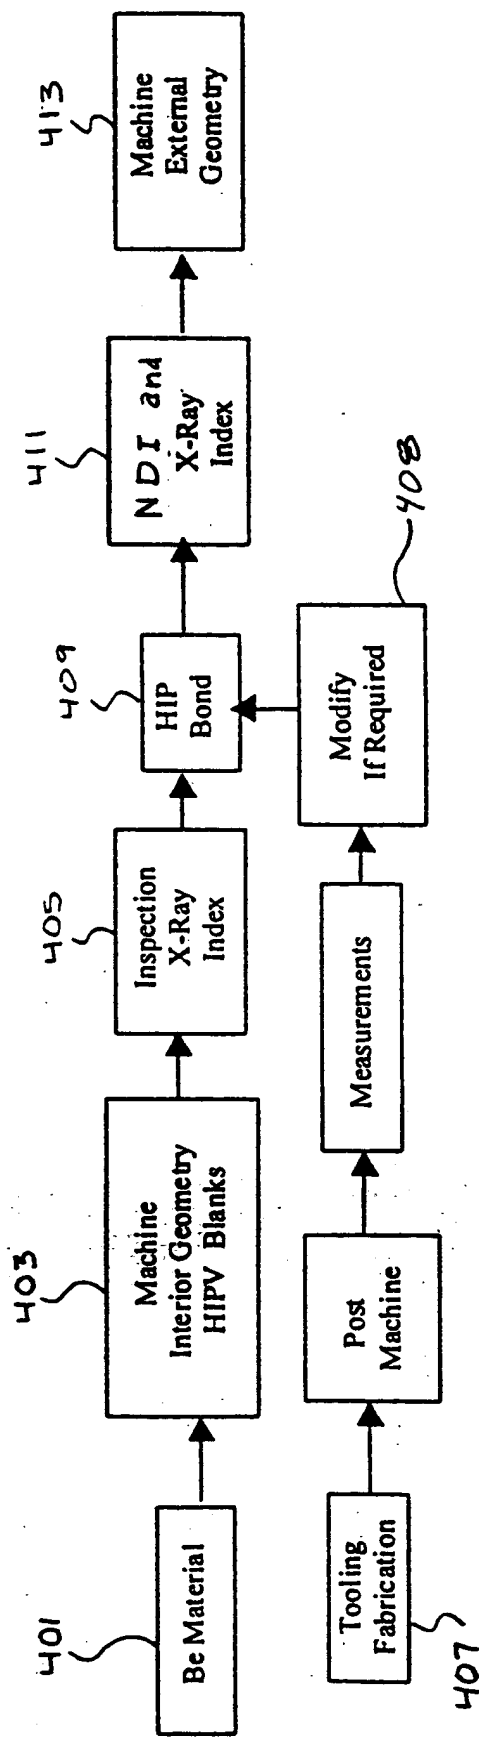


Fig. 4

FIG. 5 is a cross-sectional view of the device of FIG. 1, taken along line 5-5 of FIG. 1, showing the device in a closed position. The device includes a housing 501, a lid 502, and a gasket 503. The housing 501 includes a base 504 and a side wall 505. The lid 502 includes a top wall 230, a side wall 270, and a bottom wall 240. The gasket 503 is located between the housing 501 and the lid 502.

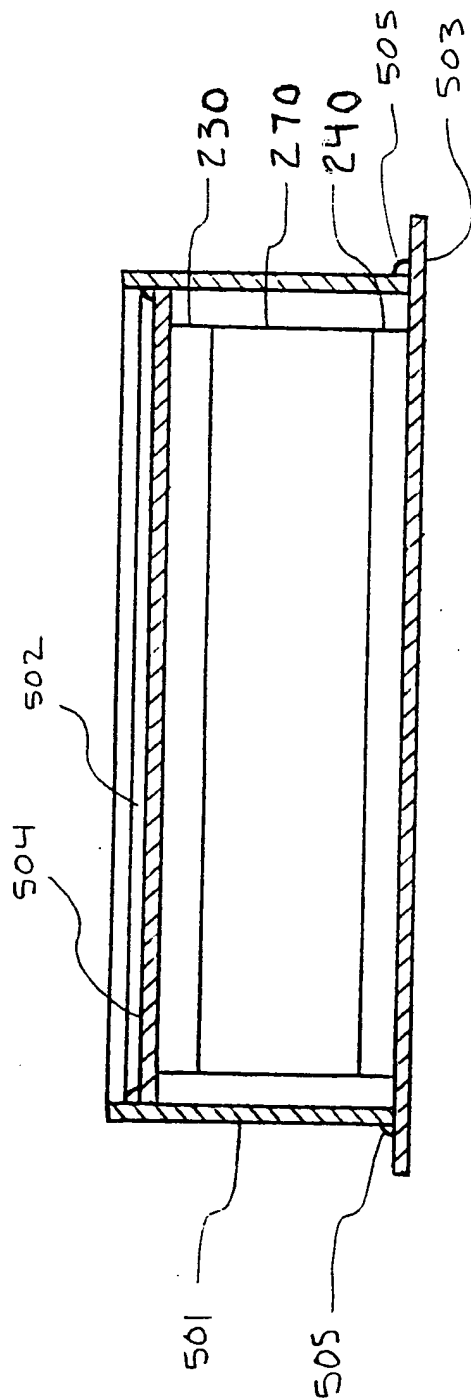


Fig. 5